



# ECF 3

## Electro-Conductive Foam 3

### Product Overview

Uvox Series 3 Electro-Conductive Foam (ECF3) is an alternative to out

standard ECF through-conductive foam. The material consists of nickel-copper electroplated polyolefin foam with a conductive adhesive backing surmounted with a release liner.




Available thicknesses are from 0.3mm to 1.0mm. The material cuts cleanly, making it ideal for internal and perimeter sealing (IP60). ECF3 provides physical shock absorption with EM shielding or grounding.

### Application

- EM shielding and grounding in hand-held devices
- Conductive gaskets for small equipment, connectors and back-planes
- EMI window gaskets

### Construction

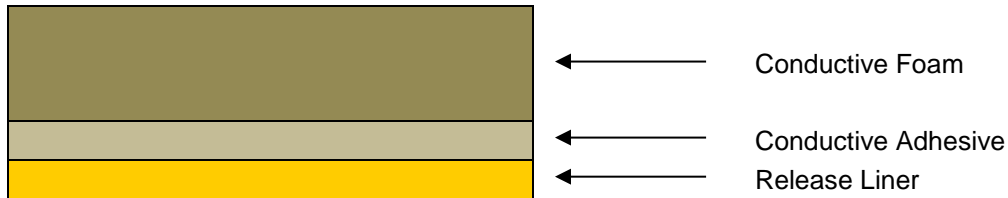

### Properties

Item	Material
Conductive Foam	Polyolefin foam: Copper/ Nickel plated
Adhesive	Acrylic copolymer and Nickel powder
Release Liner	CP paper or film (70µm)
Colour	Grey

*Technical Specification*

Property	Value	Unit	Test Method
Thickness	0.3 / 0.5 / 0.7 / 1.0	mm	-
Width	Max 500	mm	-
Length	10/25/50	m	-
Temperature Range °C	-30 / +80	°C	-
Adhesive Strength	>800	180° peel * gf/25 mm	26°C at 60% RH SUS 304 Plate 30min, 300mm/min
Holding Strength	>3,600	sec	PET film (25µm), 40°C, 500g
Resistivity	<0.2	Ω/sq.	MIL-DTL-83528c

**www.uvox.co.uk**

Uvox Ltd, Faraday Drive, Bridgnorth, Shropshire, WV15 5BA, UK

Tel: +44(0) 1746 769 369

sales@uvox.co.uk

We believe the information contained in this datasheet is accurate and representative of the product, however; it is the responsibility of the user to determine the suitability and safety of use in any application. Uvox Ltd has a policy of continual improvement of our products and services, and so reserves the right to change product specification without notice.

© Uvox Limited. All rights reserved.